

| TENDER ID | AHM20201006 |
|-----------|-------------|
| DATE | 13.01.2020 |

SBI INFRA MANAGEMENT SOLUTIONS PVT. LTD.

(A wholly owned subsidiary of SBI)

Circle Office: SBI, LHO, 3rd Floor, Bhadra, Laldarwaja, Ahmedabad-1

(Cover-A)

SBI Infra Management Solutions Pvt. Limited (SBIIMSPL), Ahmedabad on behalf of SBI invites tenders from SBIIMS, C.O., Ahmedabad empanelled electrical contractors under category upto Rs.5.0, 20.0 and 50.0 Lakh for finalizing the rates for compliance work of electrical safety auditor's observations in SBI Branches/Offices in Gujarat including Union Territories of Daman & Diu and Dadra & Nagar Haveli.

Circle Head & VP (Civil) **SBI INFRA MANAGEMENT SOLUTIONS PVT. LTD.**Circle Office,

SBI, LHO, 3rd Floor, Bhadra, Laldarwaja, Ahmedabad-1



NOTICE INVITING TENDERS

SBIIMS on behalf of SBI invite tenders from SBIIMS, C.O., Ahmedabad empanelled electrical contractors under category upto Rs.5.0, 20.0 and 50.0 Lakh for finalizing the rates for compliance of electrical safety auditor's observations in SBI Branches/Offices in Gujarat including its Union Territories.

The details of tender are as under:

| S.No. | Description | | |
|-------|--|---|--|
| 1. | Name of work | Tenders for finalizing the rates for compliance of electrical safety auditor's observations in SBI Branches/Offices in Gujarat including Union Territories. | |
| 2. | Nature of Work | Electrical Work | |
| 3. | Time allowed for completion | 15 Days from date of acceptance of work order. | |
| 4. | Tender processing fees (Non-refundable) | Rs. 1,000/- (Rupees. One Thousand Only) non-refundable to be deposited online by using SBI Internet Banking web-site www.onlinesbi.com (Detailed flow chart about how to pay tender fees online mentioned below). | |
| 5. | Earnest Money Deposit | Nil | |
| 6. | Initial Security Deposit | Nil | |
| 7. | Retention amount | Nil | |
| 8. | Date of issue of tender documents | 13.01.2020 to 22.01.2020 | |
| 9. | Last date & time for submission of Technical Bid alongwith online tender fees receipt in sealed Cover-A and Price Bid in sealed Cover-B and both these covers should be placed in a third cover in sealed cover superscribing "Tender for compliance of electrical safety auditor's observations". | 22.01.2020 by 3.00 PM | |



| 10. | Address at which tender | , | | |
|-----|---------------------------------|--|--|--|
| | has to be submitted | SBI Infra Management Solutions Pvt. Ltd. | | |
| | | Third Floor, SBI, LHO, Bhadra, | | |
| | | Laldarwaja AHMEDABAD-380001 | | |
| 11. | Date and time of opening | 22.01.2020 at 3:30 PM | | |
| | of Tenders at SBIIMS, | | | |
| 10 | Circle Office, Ahmedabad | 0.500/ | | |
| 12. | Liquidated Damages | 0.50% of contract amount per weeks subject to max. 5% of contract value or final bill value. | | |
| 13. | Defect liability period | 1 year from the date of successful installation of the system. | | |
| 14. | Validity of offer | 90 days from the date of approval of rates by the SBI. | | |
| | Validity of rates | Six months from the date of approval of rates by the Bank. | | |
| 15. | Value of Interim Certificate | Nil | | |
| 16. | Payment Terms | No advance payment will be made by the SBI. Full and final payment will be made by the respective RBO/Branche after verification and recommendation of bills for payment by the Network Electrical Engineer. | | |

Circle Head & VP (Civil), SBIIMS, C.O. Ahmedabad



Terms & Conditions;

Sealed item rate tenders are invited in the enclosed format for the said work as per following terms & conditions: -

- 1. Duly filled, signed & completed tender kept in a sealed cover and addressed to The Circle head and Vice President (SBIIMS), 3rd Floor, SBI, Local Head Office, Bhadra, Ahmedabad must reach at the above address latest by **15:00 Hrs** on **22.01.2020**. The tenders shall be opened at **15:30 Hrs** on the same day in the cabin of the "Circle head and Vice President (SBIIMS)" at this office in the presence of the bidders present for which no separate intimation will be sent.
- 2. The tenderers may visit the site before quoting the rates so as to acquaint themselves with work involved and the site conditions in consultation with Bank's engineer.
- 3. The tenderers are requested to submit a non-refundable Tender processing fees of Rs. 1000/- by way of using SBI Internet Banking website www.onlinesbi.com.
- 4. The SBIIMS will distribute the work among L1, L2, L3, L4, L5, L6 & L7 contractors in the ratio 30:20:10:10:10:10:10 if L2, L3, L4, L5, L6 & L7 contractors are ready to work at L1 rates.
- 5. Contractor has to execute the work only as per observation made by the electrical safety auditors branch wise in consultation with the Network Electrical Engineer and submit the bill for verification to the respective Network Electrical Engineer. After verification of bills Network Electrical Engineer will forward the bill for payment to the respective RBOs.
- 6. The rates quoted by the contractor shall be inclusive of all materials, labor, consumables, water, electricity, tools, plants, lights, all taxes (except GST), levies, transportation charges & disposal of waste material out side the premises, cleaning of site etc. for complete items of work as per specifications, design, pattern and instructions by the SBIIMS Engineer. GST shall be paid extra as applicable.
- 7. Contractor has to quote the % above or below the estimated cost and same will be applied on each item in BOQ.



- 8. Tenders/Offers not submitted on the enclosed Performa, incomplete/unsigned/ Conditional quotations and offers received after the due date and time shall not be evaluated/ considered.
- 9. Bank reserves the right to reject all/any quotation without assigning any reason thereof.
- 10. The rates will remain valid for acceptance for a period of 03 months from the date of approval of rates by the SBI and shall remain firm till the completion of work.
- 11. All materials to be used for the work are required to be got approved by the SBIIIMS Engineer well before using the same for the work.
- 12. The protection, security, safety and storage of all the materials of work and that of executed item of work are to be arranged by the contractor at their own cost.
- 13. The whole responsibility of safety of labourers / supervisors etc. deployed by the contractor for the said work as well as Bank's staff and Bank's property within the premises etc. lies with contractor.
- 14. All necessary insurance for labour, executed work, materials, third party insurance etc. as required as per Labour Laws/Govt. norms from time to time or otherwise are to be arranged by the contractor at his cost. Any claim arising out of the above shall be settled and borne by the contractor. The State Bank of India shall not be responsible in any way for any mishap occurred/claim raised during the execution of work till its completion. In case of failure of the contractor to settle any claim within a reasonable time, the Bank may recover such amount from any of the bill of the contractor.
- 15. No advance against any materials or payment against running bill will be given by Bank.
- 16. Contractor has to complete the entire work within a period of **15 Days** from the date of work order, failing which liquidated damages will be levied as per banks norms.




- 17. The full and final payment will be made after checking the bills by the SBIIMS electrical engineer posted in the respective Network. After bill checking and recommendation by the Network Electrical Engineer bill will be forwarded to the respective RBOs for payment. Any defect/ error arised in the completed work during the **defect liability period of 01 year** (after completion of work) shall be rectified by the vendor free of cost.
- 18. The payment will be made on actual quantities/measurements taken after the work is completed.
- 19. In case the contractor withdraws his offer during the validity period, refuses to work, expresses his unwillingness or fails to start the work at site within 07 days from the receipt of the work order, the Bank at its sole discretion may delist the contractor from its panel and/or may take any other legal action.
- 20. On the aspects not covered herein above the Bank's Standard Terms & Conditions shall be applicable.

Yours faithfully,

Circle Head & Vice President (SBIIMS Pvt. Ltd.)



HOW TO MAKE ONLINE TENDER PROCESSING FEES

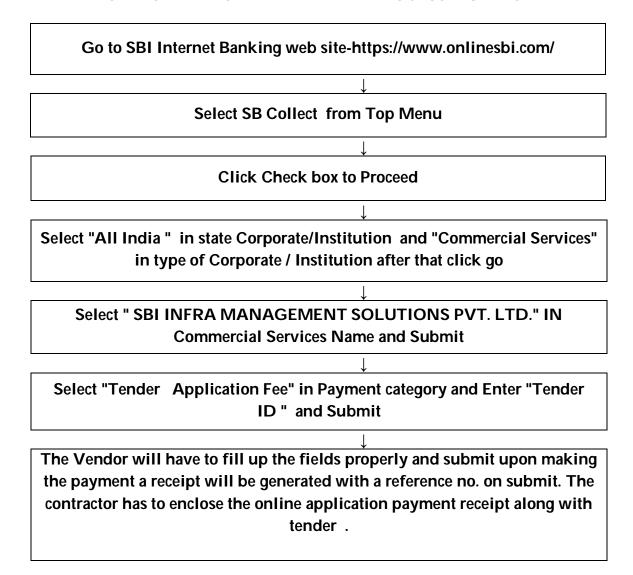



(a) List of empanelled Electrical contractors for works up to Rs.5.0 Lakh:

| S No | Name of Applicant | Contact Number/E-mail ID | GSTN No. |
|------|---|--|------------------|
| 1 | M/s Utkarsh Electricals, Off 405, Dalal Chamber, bejanji ketwal street, Nanpura, Surat. | 9825257117 utkarshelectricals@yahoo.co.in | 24AAEFU2705Q1ZX |
| 2 | M/s Dhanlaxmi Electricals, B/206, Shreenath Residency, Narol - lambha Road, Narol, Ahmedabad. 382405 | 9428739476 dhanlaxmielectrical9428@gmail.co m | 24AUOPB0440M1ZS |
| 3 | M/s Umesh Engineering Works Gala No. A-10, D M Singh Compound, Opp. Shradhha Tower, Thakur Complex, Kandiwali East, Mumbai 400101 | 09821098131,09869428623 umeshengineeringworks@gmail.co m | 27ABSPJ9380P1ZI |
| 4 | M/s Modern Engineering, FF -2, Krishna Arcade, Nr. BSNL Exchange office, Opp. Naroda GIDC, Gate No. 1, Naroda, Ahmedabad. 382330 | 9998957013 mordernengineering123@yahoo.in | 24AKWPP7006K1ZM |
| 5 | M/s Priority Solutions, 558, Amrut nagar, Nr. Akshar Appt. Laxmipura Road, Shubhanpura, Vadodara 390023 | 9825352496 prioritysolutions2014@gmail.com | 24AXYPS5321F2Z3 |
| 6 | M/s Paresh Electric Co. B/1, Harinagar Scoety, Nr. Gurukrupa School Road, CTM, Ahmedabad26 | 9824129513 paresh_electric_co@yahoo.co.in | 24AKQPP3545B1Z7 |
| 7 | M/s R P Enterprise, 309, Saraswati Complex, Manjal pur, Vadodara. 390011 | 9825467087 rpenterprise7@gmail.com | 24AQPPP1197G2ZH |
| 8 | M/s Mahadev Electrical C/o Hiren kanabar Matruashish triveni Society, Main Road, Sant kabir Road, Rajkot03. | 9824509312 hirenkanabar54@yahoo.com | 24AKWPK7262L1ZO |
| 9 | M/s Inter Deco No.14, Opp. Agrawala School, Nr. Punjab Association, Somayampalayam post KNG Pudur Pirvu, Coimbature 641108 | 9944093216 interdecocbe@gmail.com | 33AMMPS9075P1ZZ |
| 10 | M/s Harshad Furniture Mart, Sadar, Moti Tanki Chawk, Nr, Elge Travels office, JigarPan Street, Opp. Vedant Hospital, Rajkot 360001. | 9898198877 harshad_furniture@yahoo.com | 24ABJPG7477K1Z8 |
| 11 | M/s Jai Shree Tulja Electricals, GF/12, Surya deep Complex, Nr. Old Rupam Cinema, Harni Road, Vadodara. | 9825252364 vipulpurohit2013@gmail.com | 24AASTPP0592K1Z4 |

| Building SBI | |
|--------------|--------------|
| | Building SBI |

| 12 | Riya Electricals, | 9723958466 | 24AMOPC6458N1ZJ |
|----|-------------------------------|-------------------------------|-----------------|
| | 64 Shiv Shankar Nagar, Malaya | riyaelectricals1988@gmail.com | |
| | talav, Nr. Anuradha Society, | | |
| | Jivraj park, Ahmedabad 51 | | |
| 13 | Pay & Service | 9825075667 | 24ABBPL8050D1Z7 |
| | 309,Sadguru arcade,Dehbar | payandservice72@gmail.com | |
| | road one way , Nr. Jivan | | |
| | Commercial Bank , Rajkot - | | |
| | 360001 | | |

(b) List of selected empanelled Electrical contractors for works up to Rs.20.0 Lakh:

| 1 | M/s Dhaemesh A Mewada, 123, Sangath Mall 1 Opp. Govt. Engineering College, Visat- Gandhinagar Highway, Motera, Ahmedabad. 05 | 9725043778, dharmeshmewada17@gmail.com | 24AGSPM3021F1ZM |
|----|--|---|------------------|
| 2 | M/s Mamta Electricals, 68, Shramjivi Society no. 1, Umra , Ichhanath, Surat. | 9898599899 hem_sukhadia@yahoo.com | 24AAXFM2580L1ZN |
| 3 | M/s Parameter Engineering Projects, Office No. 7&8, 3rd Floor, Jyoti Plaza, Shyaml Cross Road, Satellite, Ahmedabad, 15 | 9824013257 hnn@parameter.in | 24AALFP5055D1ZD |
| 4 | M/s Urmi Electric Co. B/5, Jaimini Appt, Nr. Lalbaug Society, Nava Vadaj, Ahmedabad. | 9825342374 urmiele@yahoo.co.in | 24AERPS0016F1ZO |
| 5 | M/s Vikalap Electricals, LL-1, OM Centre, Nr. Shreyas Crossing, Ambawadi, Ahmedabad. 15 | 9825307125 vikalp1991@yahoo.com | 24AAYPP0171F1ZK |
| 6 | M/s N.K Electricals, SB/B-3, Indraprasth Complex, Opp. Veg market, Illora Park, Vadodara. 390007 | 9825061543 ketanna@gmail.com | 24 AAGPT2486H1ZG |
| 7 | M/s R.B Trading Co. 9,GF,HH Trust Building, Nr. Kothari Pole, Gandhi Road, Ahmedabad. 01. | 9824002488 rbtrading99@yahoo.co.in | 24ACJPS9065N2ZR |
| 8 | M/s Gorisha Electricals A/102, Ayodhya flats, Ayodhya Town ship, B/h Motinagar, Tarsali, Vadodara. 390009 | 9904757686 rajesh6765@gmail.com | 24ACUPJ0231E1ZZ |
| 9 | M/s Shreeji Electricals, U-10 Lake view flat, opp. Vastrapur lake, Vastrapur, Ahmedabad, | 9726079224 shreejiele10@gmail.com | 24BJAPK1760K1ZD |
| 10 | Kruti Electricals 626,Mandir Street,postmota,Varachha,Surat, | 9723454883 archkrut@gmail.com | 24AAPFK2484F2Z6 |
| 11 | M/s Shivam Electrical 26,Ambikadham Society,GIDC,Vadsar Road, Nr., Vasantbihar Society, Vadodara | 9998538042 ajayrajput9684@gmail.com | 24AQBPR7028JIZP |



| | 390010 | | |
|----|---|---|-----------------|
| 12 | M/s K.C. Electrical & Trading D-44, Motinagar 3, Nr. Ayodhya Township, Tarsali, Vadodara. | 9408102250 kcelectricalandtrading@gmail.com | 24AHQPC3051J1ZH |
| 13 | Vaidehi Enterprise 15,Trishala Residency,Nr. Ganesh Park Twin bunglows, opp.sola highcourt,nr. R.C Technical college, Sola ,Ahmedabad 380 061 | 9327014869 piyushpatel65@yahoo.co.in vaidhienterprise96@gmail.com | 24AAZPP4066C1ZF |
| 14 | System Protection 301/2,Silver line complex, opp.BBC Tower, Sayanji ganj ,Vadodara 390020 | 909909498 bdm@systemprotection.in | 24AAXFS4981P1ZO |

(c) List of selected empanelled Electrical contractors for works up to Rs.50.0 Lakh:

| 1 | M/s Royal Electric Sales & Service, F/6, Vikram Chamber, Nr. Sales India, Ashram Road, Ahmedabad. | 9558179999 royal.electric@yahoo.co.in | 24AGXPP1052G1Z9 |
|---|---|---|-------------------|
| 2 | M/s Maya Transformer & Electricals, C/9, Gopinath Society, Opp. S.K Complex, India Colony Road, bapunagar, Ahmedabad. 380024 | 9825716962 mayatrel@yahoo.com | 24ALQPR5791N1Z2 |
| 3 | M/s Kirti Traders, Jeevan Mansion, Lathi Bazar, Bhavnagar, | 9426538801 | . 24ABLPD9631N1ZB |
| 4 | M/s Dhriti Engineers, 28, Mahadev Nagar Society, O/S Panigate, B/h Govindrao Park, Ayurvedik, Vadodara. 19 | 9998981088 dhritiengineers@gmail.com | 24AXFPS5964B1ZE |
| 5 | M/s A.K. Electricals Engineering, Shaikh Shamsuddin Chawl, R NO. D-5, Qureshnagar, Kurla East, MUMBAI 70. | 9869040950 imran@akelectricalengineering.co m | 24AABPK5231A1ZD |
| 6 | M/s Indian Electric Corporation, A-1, Hemali Bunglows, Nr. Navchetan Highschool, Opp. Katchi jain Samaj, Paldi, Ahmedabad. 07 | M: 9327578375 Email: info@iecprojects.co.in | 24AAXPM0763B1ZP |
| 7 | M/s Niyati Engineers Soham, 1/44 Govt. Hous. Soc, 150 Ring Road, B/h Kidvai nagar, RAJKOT. 360007 | 9227602074 niyatiengineers@gmail.com | 24ABMPC7254K1ZI |
| 8 | M/s Vimla Electricals 4, Nayandeep Appt., b/h Chief justice bunglow, Jadges bunglow Road, Bodakdev, Ahmedabad54. | 9978828663 vimlaelectricals@gmail.com | 24AAYKPP2362H1ZM |



| 9 | M/s Aum Electric Engineering Pvt.Ltd. 10, Radhenagar Society, PO Ichchhanath, Opp. Sargam Shoping Center, Athvwalines, | 9825093003 aumelectric1994@yahoo.co.in | 24AAFCA2743N1ZM |
|----|--|--|-----------------|
| 10 | Surat. 395007 M/s Alpha Enterprise A-2, Shrihari Complex, Lad Society Road, Nehrupark, Vastrapur, Ahmedabad. 15 | 9898516773 alphaenterprise13@gmail.com | 24ABXPB6340E1ZS |
| 11 | M/s Bhagat Electricals, 101, Shailya Sankul, Nr. Amrapali Railway Crossing, Raiya Road, Rajkot. 360001. | 9825165426 bhagatelectricals@yahoo.co.in | 24ABPPB7859L1Z3 |
| 12 | M/s Sai Electrical Works, 19/2/28 Store lane off SA brelvi road, Bahadur Manjil, Fort bazar gate, Mumbai. | 766654111 saielectricworks@gmail.com | 27AAAPP3577F1ZM |
| 13 | Patel Electricals 1/A Aastha Complex, Nr. Sanskarmandal Chowk, Talaja Road, Bhavnagar. Ph: 0278- 2225584, | 9374754747,9825088095 patelelectricals55@gmail.com, | 24AANFP8435H1ZX |
| 14 | Power Control 18,Sur Sarthi complex, b/h Rudra Complex,Ambawadi,Ahmedabad, 08 | 9904004123 info@powercontrol.co | 24AAEFP1154G2ZL |
| 15 | S.R.Electricals 4th floor, /402 Sahyog Elena 57 to 60, Chintamani society ,VIP Main Road, Karelibaug, Vadodara390018 | 9898161070 srelectric73@yahoo.com | 24AGTPS9279G1ZH |



DECLARATION BY THE CONTRACTOR

I have read and understood the above mentioned terms & conditions and are acceptable to me. We also confirm that work allotted to us will be completed within the time stipulated in the tender.

| (Contractor's Signature with Seal of firm) | |
|--|--------|
| Date: | Place: |



% RATE TENDER BOQ FOR COMPLIANCE OF ELECTRICAL SAFETY AUDIT CONDUTED AT SBI BRANCHES IN GUJARAT INCLUDING UNION TERRITORIES

| | GUJARAT INCLUDING UNION TERRITORIES | | | | |
|-----------|--|-----|-----|---------------|-----------------|
| S. No. | DESCRIPTION | QTY | UNI | RATE (Rs.) | AMOUNT (Rs.) |
| 1 | Removing of old MCB & RCCB and Installation of new MCB and RCCB (Hager/ABB/C&S/Schineder/L&T/Legrand) | | | (N3.) | (N3.) |
| а | 6 A to 32 A SP MCB | 1 | No. | 250 | 250 |
| b | 6 A to 32 A DP MCB | 1 | No. | 650 | 650 |
| С | 40 A to 63 A DP MCB | 1 | No. | 1050 | 1050 |
| d | 40 A to 63 A FP MCB | 1 | No. | 1600 | 1600 |
| е | 6 A to 32 A DP RCCB | 1 | No. | 1800 | 1800 |
| f | 40 A to 63 A DP RCCB | 1 | No. | 2500 | 2500 |
| g | 40 A to 63 A FP RCCB | | No. | 2800 | 2800 |
| 2 | Supply and Installation of the 18 Watt LED Tube Light | | No. | 400 | 400 |
| 3 | Supply and Installation of the 15 Watt Down light | | No. | 500 | 500 |
| 4 | Providing and Installation of the Chowk for the 2' x 2' LED or CFL Light Fixtures | 1 | No. | 250 | 250 |
| 5 | SITC of the Switches and Sockets (MK/Salzer/Crantree/Legrand/C&S) | | | | |
| а | 5 A Switches | 1 | No. | 70 | 70 |
| b | 5 A Sockets | 1 | No. | 105 | 105 |
| С | 15 A Switches | | No. | 120 | 120 |
| d | 15 A Sockets | | No. | 150 | 150 |
| 2 | Supply and installation of Exhaust fan of 300 mm, fresh air ventilator type complete & 6 Amp. 3 pin top (Crompton/ Khaitan / Havells make) | 1 | no | 1600 | 1600 |



| | [Wooden mounting frame should be fixed in coordination with carpenter - furniture contractor.] - One Ex. Fan is of heavy | | | | |
|---|--|---|-----|-------|-------|
| 3 | duty industrial for Ups room. Providing and Installing of 100A/125A | 1 | no | 15000 | 15000 |
| 3 | MCCB FP with Earth fault Relay + U V Protection + Shunt Trip Protection (Ics = 100% Icu., confirmed to IS / IEC 60947 - 2 adjustable Ir rating from 0.7 to 1) Unit M. S. compartment enclosure IP65 with hinged door & locking arrangement duly fabricated from 18 SWG sheet metal box duly painted with one coat of red-oxide paint and two coats of approved enamel paints with 100A/125A OPEN TYPE MCCB UNIT with phase indicator LED lamps phase wise fuses + control fuses & wooden back complete. THIS WILL BE INSTALLED NEAR MAIN DOOR - INSIDE THE BRANCH TO SWITCH OFF ALL LOAD EXCEPT UPSS | | 110 | 13000 | 13000 |
| 4 | AND SERVER. (ABB/C&S/L&T/Legrand) SITC of Aluminum armoured cable of size 35 sq mm 3.5 core | 1 | Mtr | 180 | 180 |
| | 50 sq mm 3.5 core | 1 | Mtr | 240 | 240 |
| | 70 sq mm 3.5 core (RR Kable/Torrent/Finolex/Polycab) | 1 | Mtr | 290 | 290 |
| 5 | EARTHING SYSTEM: | | | | |
| | Providing and making Earthing Pit with all necessary material and making masonry kundi, watering arrangement etc complete as per ISI 3043-1987 (FOLLOWING ITEMS MAY OPERATE). Resistivity as per IEC / IS. (3 years Manufacturer Warranty. Earthing | | | | |
| | Certificate Need to Attached). (At the Time of buried of earthing Photograph must be taken Without Photographic Proof Earthing Will be Rejected. Earthing Road Photo Must be attached with Bill.) | | | | |

| Building SBI |
|--------------|

| 5.1 | JEF ECO SAFE environment friendly electrical grounding system with T-193- Hot Dip Galvanized, having 50mm dia. of outer pipe and 25 mm dia. of inner pipe and length of 3mtrs with 50kg Back Fill Compound as per UL 476, of Power fill Eco friendly electrical grounding backfill compound and clamp (DB - PANEL) - G. I ASHLOK / ETP / HDP / 48/3 or equivalent make. (DB - PANEL) | 1 | no | 11000 | 11000 |
|-----|--|---|-----|-------|-------|
| 5.2 | JEF ECO SAFE environment friendly electrical grounding system with T-193-Copper Coated, having 50mm dia. of outer pipe and 25 mm dia. of inner pipe and length of 3mtrs with 50kg Back Fill Compound as per UL 476, of Power fill Eco friendly electrical grounding backfill compound and clamp (UPS) - ASHLOK / ETP / CUP / 48/3 or equivalent make Cu. (UPS) | 1 | no | 12500 | 12500 |
| 6 | Supply, laying and jointing of following wire / strip / earth cable on walls, ceiling etc. With necessary non rusting clamps, washers, nuts and bolts etc complete. | | | | |
| 6.1 | 25 x 3 mm G.I. Strip - From G. I. Earth pit to Main Panel + From Cu. Earth pit to UPS I / P DB. | 1 | Rmt | 65 | 65 |
| 6.2 | 25 x 3 mm CU strip. | 1 | Rmt | 750 | 750 |
| 6.3 | Providing 4 Sq. mm flexible wire in FRLS PVC Conduit as Earthing whereas required | 1 | Rmt | 80 | 80 |



| 6.4 | Providing Brick masonry earthing chamber with M.S framed cover and Funnel for the recharging | 1 | Job | 500 | 500 |
|-----|---|---|-----|------|------|
| 7 | Supply and installation of 24 Hr., 7 days A.C. timer with 2 nos power connector of M.D.S, L & T, SEIMENS, THEBEN (indoasian) Make. All enclosed in sheet steel powder coated enclosure complete with all necessary termination for system room A.C. with use of end connectors, push button switches, LED indicators for two ACs. | | nos | 5000 | 5000 |
| 8 | Proper enclosure of Electrical Panel /DBs with Isolation and dressing of wires, cables | 1 | job | 500 | 500 |
| 9 | SITC of Amp Meter Accuracy Class 1 , Ratio=100/5 Amp, Make : AE or yokins | 1 | nos | 1200 | 1200 |
| 10 | SITC of Indication lamps (R,Y,B) ,Make Specific or Jigo | 1 | nos | 1200 | 1200 |
| 11 | SITC of Voltmeter Range =0 to 500 Volts, Make: AE or yokins | 1 | nos | 1200 | 1200 |
| 12 | Laisioning work (addition Load) with Electric supply Co., Submission of test report to the electricity company and submit their approval to the branch. (Security deposit to electricity company will be paid by the branch/landlord) | 1 | job | 4000 | 4000 |
| 13 | Providing 3"x3" Danger board as per IS | 1 | No | 500 | 500 |
| 14 | Conduiting and fixing the all flexible wires | 1 | Rmt | 75 | 75 |
| 15 | Fixing of loose switch board with screw of suitable size and plug | 1 | No. | 50 | 50 |



| 16 | Fixing of loose cable with clamp | 1 | Rmt | 50 | 50 |
|----|--|---|-----|------|---------|
| 17 | Replacement of the Industrial Socket with DP MCB for A.C | 1 | Job | 2000 | 2000 |
| 18 | SITC of movement sensors (Salzer or equivalent) with wiring (4 nos 2x2 or 8 nos down lighters on one sensor) | | No. | 1900 | 1900 |
| | TOTAL ESTIMATED AMOUNT (Rs.): | | | | 72125/- |
| | % ABOVE OR BELOW THE ESTIMATED COST: ABOVE% OR BELOW% (Contractor has to mention only % above or below of estimated cost in the above line and same % shall be applied on each items) | | | | |
| | (CCT Fytra) | | | | |

(GST Extra)

| (Signature of the authorized | l person with s | stamp of the firm) |
|------------------------------|-----------------|--------------------|
|------------------------------|-----------------|--------------------|

Date:

Place:

GSTN No.:

E-mail ID: