



<b>TENDER ID</b>	<b>AHM201905004</b>
<b>DATE</b>	<b>13.05.2019</b>

**SBI INFRA MANAGEMENT SOLUTIONS PVT. LTD.**

(A wholly owned subsidiary of SBI)

Circle Office:

SBI, LHO, 3<sup>rd</sup> Floor, Bhadra, Laldarwaja, Ahmedabad-1

**(Cover-A)**

SBI Infra Management Solutions Pvt. Limited (SBIIMSPL), Ahmedabad on behalf of SBI invites % rate tenders from Bank's empanelled electrical contractors under category E-1 to E-5 for compliance for electrical safety auditor's observations in SBI Branches across Gujarat including Union Territories.

Duly filled tender documents along with all supporting documents should reach us on or before 3:00 pm on 21.05.2019. Tenders received after due date and time will not be considered for evaluation. SBIIMS reserves its right to accept/reject any or all the tenders without assigning any reason.

Circle Head & VP (Civil)

**SBI INFRA MANAGEMENT SOLUTIONS PVT. LTD.**

Circle Office,

SBI, LHO, 3<sup>rd</sup> Floor, Bhadra, Laldarwaja, Ahmedabad-1



## NOTICE INVITING TENDERS

SBIIMS on behalf of SBI invite tenders for compliance of electrical safety auditor's observations in SBI Branches in Gujarat including Union Territories.

The details of tender are as under:

S.No.	Description	
1.	Name of work	Tenders for compliance of electrical safety auditor's observations in SBI Branches in Gujarat including Union Territories.
2.	Nature of Work	Electrical Work
3.	Time allowed for completion	<b>30 Days from date of acceptance of work order.</b>
4.	Cost of Tender Documents	<b>Rs. 2,000/- (Rupees. Two Thousand Only)</b> non-refundable to be deposited online by using SBI Internet Banking web-site <a href="http://www.onlinesbi.com">www.onlinesbi.com</a> (Detailed flow chart about how to pay tender fees online mentioned below).
5.	Earnest Money Deposit	Nil
6.	Initial Security Deposit	Nil
7.	Retention amount	Nil
8.	Date of downloading of tender documents from Bank's web-site <a href="http://www.sbi.co.in">www.sbi.co.in</a>	13.05.2019 to 20.05.2019
9.	Last date & time for submission of Technical Bid alongwith online tender fees receipt in sealed Cover-A and Price Bid in sealed Cover-B and both these covers should be placed in a third cover in sealed cover superscribing "Tender for compliance of electrical safety auditor's observations".	<b>21.05.2019 by 3.00 PM</b>
10.	Address at which tender has to be submitted	Circle Head & Vice President, SBI Infra Management Solutions Pvt. Ltd. Third Floor, SBI, LHO, Bhadra, Laldarwaja AHMEDABAD-380001




11.	Date and time of opening of Tenders at SBIIMS, Circle Office, Ahmedabad	<b>21.05.2019 at 3:30 PM</b>
12.	Liquidated Damages	0.50% of contract amount per weeks subject to max. 5% of contract value or final bill value.
13.	Defect liability period	1 year from the date of successful installation of the system.
14.	Validity of offer	90 days from the date of approval of rates by the SBI.
15.	Value of Interim Certificate	<b>Nil</b>
16.	Payment Terms	No advance payment will be made by the SBI. Full and final payment will be made by the respective RBOs after verification and recommendation of bills for payment by the Network Electrical Engineer.

Circle Head & VP (Civil),  
SBIIMS,  
Ahmedabad



## HOW TO MAKE ONLINE APPLICATION FEES

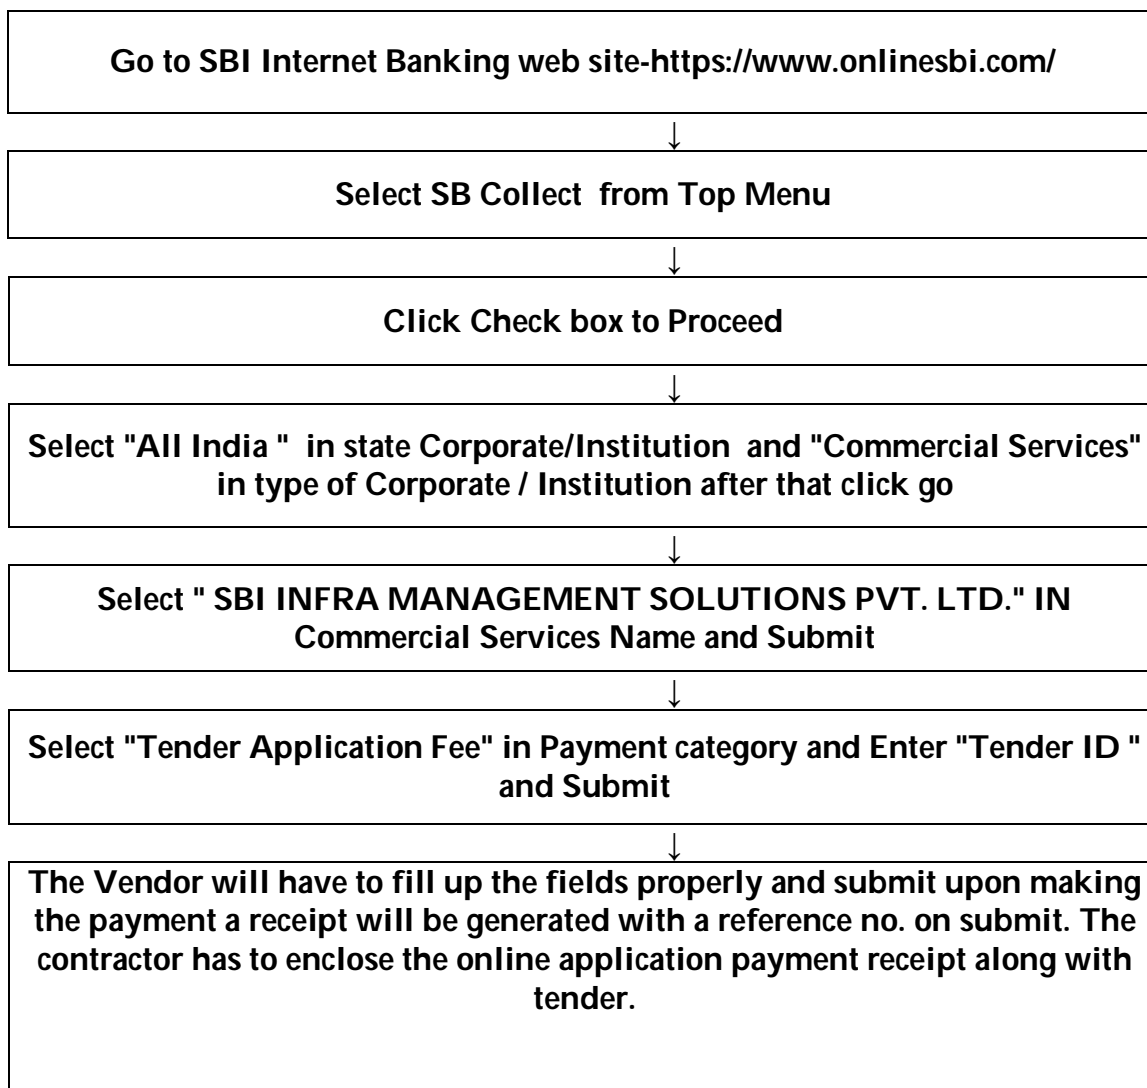



### **Terms & Conditions;**

Sealed % rate tenders are invited in the enclosed format for the said work as per following terms & conditions: -

1. Duly filled, signed & completed tender kept in a sealed cover and addressed to The Circle head and Vice President (SBIIMS), 3<sup>rd</sup> Floor, SBI, Local Head Office, Bhadra, Ahmedabad must reach at the above address latest by **15:00 Hrs** on **21.05.2019**. The tenders shall be opened at **15:30 Hrs** on the same day in the cabin of the “Circle head and Vice President (SBIIMS)” at this office in the presence of the bidders present for which no separate intimation will be sent.
2. The tenderers may visit the site before quoting the rates so as to acquaint themselves with work involved and the site conditions in consultation with Bank’s engineer.
3. The tenderers are requested to submit a Tender fee **amount of Rs. 2000/- by way of** using SBI Internet Banking web-site [www.onlinesbi.com](http://www.onlinesbi.com).
4. The SBIIMS will distribute the work among L1, L2, L3, L4 and L5 contractors in the ratio 30:25:20:15:10 if L2, L3, L4, and L5 contractors are ready to work at L1 rates.
5. Contractor has to execute the work only as per observation made by the electrical safety auditors branch wise in consultation with the Network Electrical Engineer and submit the bill for verification to the respective Network Electrical Engineer. After verification of bills Network Electrical Engineer will forward the bill for payment to the respective RBOs.
6. The rates quoted by the contractor shall be inclusive of all materials, labor, consumables, water, electricity, tools, plants, lights, all taxes (except GST), levies, transportation charges & disposal of waste material out side the premises, cleaning of site etc. for complete items of work as per specifications, design, pattern and instructions by the SBIIMS Engineer. GST shall be paid extra as applicable.
7. Contractor has to quote the % above or below the estimated cost and same will be applied on each item in BOQ.
8. Tenders/Offer not submitted on the enclosed Performa, incomplete/unsigned/ Conditional quotations and offers received after the due date and time shall not be evaluated/ considered.
9. Bank reserves the right to reject all/any quotation without assigning any reason thereof.
10. The rates will remain valid for acceptance for a period of 03 months from the date of approval of rates by the SBI and shall remain firm till the completion of work.



11. All materials to be used for the work are required to be got approved by the SBIIMS Engineer well before using the same for the work.
12. The protection, security, safety and storage of all the materials of work and that of executed item of work are to be arranged by the contractor at their own cost.
13. The whole responsibility of safety of labourers / supervisors etc. deployed by the contractor for the said work as well as Bank's staff and Bank's property within the premises etc. lies with contractor.
14. All necessary insurance for labour, executed work, materials, third party insurance etc. as required as per Labour Laws/Govt. norms from time to time or otherwise are to be arranged by the contractor at his cost. Any claim arising out of the above shall be settled and borne by the contractor. The State Bank of India shall not be responsible in any way for any mishap occurred/claim raised during the execution of work till its completion. In case of failure of the contractor to settle any claim within a reasonable time, the Bank may recover such amount from any of the bill of the contractor.
15. No advance against any materials or payment against running bill will be given by Bank.
16. Contractor has to complete the entire work within a period of **30 Days** from the date of work order, failing which liquidated damages will be levied as per banks norms.
17. The full and final payment will be made after checking the bills by the SBIIMS electrical engineer posted in the respective Network. After bill checking and recommendation by the Network Electrical Engineer bill will be forwarded to the respective RBOs for payment. Any defect/ error arised in the completed work during the **defect liability period of 01 year** (after completion of work) shall be rectified by the vendor free of cost.
18. The payment will be made on actual quantities/measurements taken after the work is completed.
19. In case the contractor withdraws his offer during the validity period, refuses to work, expresses his unwillingness or fails to start the work at site within 07 days from the receipt of the work order, the Bank at its sole discretion may delist the contractor from its panel and/or may take any other legal action.
20. On the aspects not covered herein above the Bank's Standard Terms & Conditions shall be applicable.

Yours faithfully,

Circle Head & Vice President (SBIIMS Pvt. Ltd.)



### **DECLARATION BY THE CONTRACTOR**

I have read and understood the above mentioned terms & conditions and are acceptable to me.  
We also confirm that work allotted to us will be completed within the time stipulated in the tender.

(Contractor's Signature with Seal of firm)

Date:

Place:



**% RATE BOQ FOR COMPLIANCE OF ELECTRICAL SAFETY AUDIT CONDUTED AT SBI  
BRANCHES IN  
GUJARAT INCLUDING UNION TERRITORIES (PRICE BID-COVER "B")**

Sr. No.	DESCRIPTION	QTY	UNIT	RATE (Rs.)	AMOUNT (Rs.)
<b>1</b>	Removing of old MCB & RCCB and Installation of new MCB and RCCB				
a	6 A to 32 A SP MCB	1	No.	250	250
b	6 A to 32 A DP MCB	1	No.	650	650
c	40 A to 63 A DP MCB	1	No.	1000	1000
d	40 A to 63 A FP MCB	1	No.	1500	1500
e	6 A to 32 A DP RCCB	1	No.	2000	2000
f	40 A to 63 A DP RCCB	1	No.	2500	2500
g	40 A to 63 A FP RCCB	1	No.	3000	3000
<b>2</b>	Supply, removing of old light and Installation of the 18 Watt LED Tube Light	1	No.	550	550
<b>3</b>	Supply, removing of old light and Installation of the 15 Watt Down light	1	No.	750	750
<b>4</b>	Providing, removing of old chowk and Installation of the Chowk for the 2' x 2' LED or CFL Light Fixtures	1	No.	250	250
<b>5</b>	Removing of old switches, supply and installation of new Switches and Sockets				
a	5 A Switches	1	No.	90	90
b	5 A Sockets	1	No.	140	140
c	15 A Switches	1	No.	160	160
d	15 A Sockets	1	No.	200	200





2	Removing, Supply and installation of new Exhaust fan of 300 mm, fresh air ventilator type complete & 6 Amp. 3 pin top (Crompton/ Khaitan / Havells make) <b>[Wooden mounting frame should be fixed in coordination with carpenter - furniture contractor.] - One Ex. Fan is of heavy duty industrial for Ups room.</b>	1	no	1600	1600
3	Providing and Installing of 100A/125A MCCB FP with Earth fault Relay + U V Protection + Shunt Trip Protection ( Ics =100% Icu., confirmed to IS / IEC 60947 -2 adjustable Ir rating from 0.7 to 1 ) Unit M. S. compartment enclosure IP65 with hinged door & locking arrangement duly fabricated from 18 SWG sheet metal box duly painted with one coat of red-oxide paint and two coats of approved enamel paints with 100A/125A OPEN TYPE MCCB UNIT with phase indicator LED lamps phase wise fuses + control fuses & wooden back complete. THIS WILL BE INSTALLED NEAR MAIN DOOR - INSIDE OR OUTSIDE - OF THE BANK.	1	no	13000	13000
<b>4</b>	<b>EARTHING SYSTEM:</b>				
	Providing and making Earthing Pit with all necessary material and making masonry kundi, watering arrangement etc complete as per ISI 3043-1987 <b>(FOLLOWING ITEMS MAY OPERATE). Resistivity as per IEC / IS. ( 3 years Manufacturer Warranty. Earthing Certificate Need to Attached).( At the Time of buried of earthing Photograph must be taken Without Photographic Proof Earthing Will be Rejected. Earthing Road Photo Must be attached with Bill.)</b>				
4.1	JEF ECO SAFE environment friendly electrical grounding system with T-193- Hot Dip Galvanized, having 50mm dia. of outer pipe and 25 mm dia. of inner pipe and length of 3mtrs with 50kg Back Fill Compound as per UL 476, of Power fill Eco friendly electrical grounding backfill compound and clamp (DB - PANEL) - G. I. - ASHLOK / ETP / HDP / 48/3 or equivalent make. (DB - PANEL) .	1	no	11000	11000



4.2	JEF ECO SAFE environment friendly electrical grounding system with T-193- Copper Coated, having 50mm dia. of outer pipe and 25 mm dia. of inner pipe and length of 3mtrs with 50kg Back Fill Compound as per UL 476, of Power fill Eco friendly electrical grounding backfill compound and clamp (UPS ) - ASHLOK / ETP / CUP / 48/3 or equivalent make. - Cu. ( UPS ) .	1	no	12000	12000
5	Supply, laying and jointing of following wire / strip / earth cable on walls, ceiling etc. With necessary non rusting clamps, washers, nuts and bolts etc complete.				
5.1	25 x 3 mm G.I. Strip - From G. I. Earth pit to Main Panel + From Cu. Earth pit to UPS I / P DB.	1	Rmt	50	50
5.2	25 x 3 mm CU strip.	1	Rmt	700	700
5.3	Providing 4 Sq. mm flexible wire in PVC Conduit as Earthing whereas required	1	Rmtr	80	80
5.4	Providing Brick masonry earthing chamber with M.S framed cover and Funnel for the recharging	1	Job	800	800
6	Supply and installation of 24 Hr., 7 days A.C. timer with 2 nos power connector of M.D.S, L & T, SEIMENS , THEBEN (indoasian) Make. All enclosed in sheet steel powder coated enclosure complete with all necessary termination for system room A.C. with use of end connectors, push button switches, LED indicators for two ACs.	1	nos	5000	5000
7	Proper enclosure of Electrical Panel /DBs with Isolation and dressing of wires, cables	1	job	500	500
8	SITC of Amp Meter Accuracy Class 1 , Ratio=100/5 Amp, Make : AE or yokins	1	nos	1200	1200
9	SITC of Indication lamps (R,Y,B) ,Make Specific or Jigo	1	nos	100	100
10	SITC of Voltmeter Range =0 to 500 Volts, Make : AE or yokins	1	nos	500	500
11	Laisioning work ( addition Load ) with Electric supply Co., Submission of test report to the electricity company and submit their approval to the branch. (Security deposit to electricity company will be paid by the branch/landlord)	1	job	5000	5000
12	Providing 3"x3" Danger board as per IS	1	No	200	200
13	Conduiting and fixing the all flexible wires	1	Rmt	200	200



14	Fixing of loose switch board with screw of suitable size and plug	1	No.	250	250
15	Fixing of loose cable with clamp	1	Rmt	200	200
16	Replacement of the Industrial Socket with DP MCB for A.C	1	Job	2000	2000
	<b>TOTAL ESTIMATED AMOUNT (Rs.):</b>				67,420.00
	<b>% ABOVE OR BELOW THE ESTIMATED COST: ABOVE_____ % OR BELOW_____ %</b> <b>(Contractor has to mention only % above or below of estimated cost in the above line and same % shall be applied on each items)</b>				

(GST Extra)

(Signature of the authorized person with stamp of the firm)

Date:

Place:

GSTN No.:

E-mail ID: